

## AMC750 – Processor AMC, Intel Xeon E5-2648L v4, PCIe Gen3, with PinoutPlus™

PrAMC Xeon E5, PCIe Gen 3



### KEY FEATURES

- Processor AMC Intel® Xeon E5-2648L v4
- PCIe Gen 3 on ports 4-7 and 8-11(AMC.1)
- x16 PCIe Gen 3 via Tongue 2, optional PCIe to ports 12-15, 17-20
- Video output via DVI-I connector
- GbE to port 0 and 1, SATA to port 2 and 3 (AMC.3)
- Dual GbE to the front panel
- Four banks of DDR4 memory with ECC
- Double module, full-size per AMC.0
- Optional TPM (Trusted Platform Module)
- Serial over LAN
- IPMI 2.0 compliant

**AdvancedMC™**

### Benefits of Choosing VadaTech

- PinoutPlus™ makes use of the tongue 2 connector per AMC.0 spec for up to 100 W of power and expanded PCIe connectivity
- Graphics output via DVI-I Port
- Four banks of on-board DDR4 memory
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- AS9100 and ISO9001 certified company

The AMC750 is a Processor AMC (PrAMC) in a double module, full-size AdvancedMC (AMC) form factor based on the Intel® Xeon E5-2648L v4 which has 14 Cores @ 1.8 GHz. The module follows the AMC.1 and AMC.3 specifications.

The module provides PCIe Gen3 x16 PinoutPlus™ on tongue 2, providing high-bandwidth connectivity to co-processors such as GPU, Cavium, Tiler, FPGA, etc (where supported by appropriate chassis such as VadaTech VT815). The use of the tongue 2 connector complies with the AMC.0 specification. Additional expansion is supported on the AMC750 with optional PCIe on ports 12-15 and 17-20.

GbE is provided on ports 0 and 1 per AMC.2, and SATA on ports 2 and 3 per AMC.3. It also provides dual GbE to the front panel.

The AMC750 provides 32 GB of DDR4 memory with ECC and 32 GB of Flash via a SATA disk for the OS. The module has serial over LAN with hardware Random Number Generator (RNG) as seed generator for authentication. The BIOS allows booting from on-board Flash, off-board SATA, PXE boot and USB. There are dual USB for extended storage or peripherals.

Linux OS is standard on the AMC750, consult VadaTech for other options.

BLOCK DIAGRAM

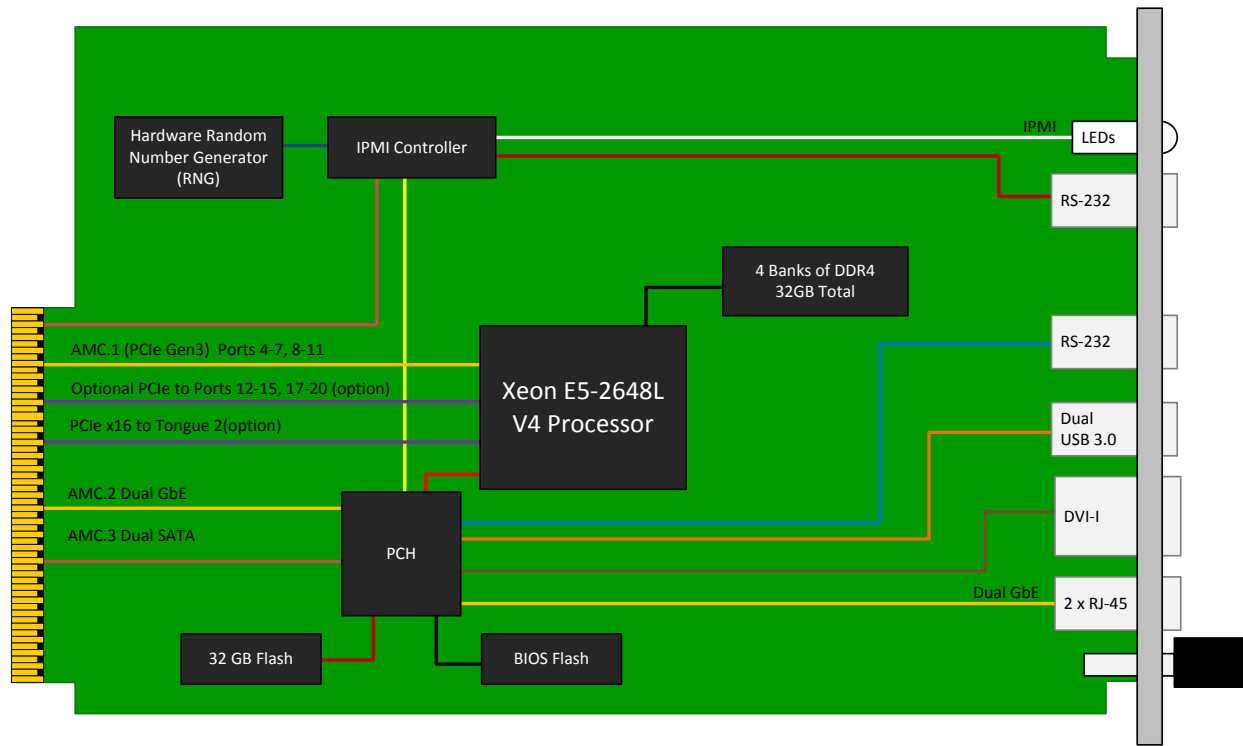


Figure 1: AMC750 Functional Block Diagram

## SPECIFICATIONS

Architecture		
Physical	Dimensions	Double-module, full-size
		Width: 5.85 in. (148.5 mm)
		Depth: 7.11 in. (180.6 mm)
Type	AMC Processor	Intel® v4 Generation Xeon E5 with fourteen cores up to 1.8 GHz , 30 MB Cache
Standards		
AMC	Type	AMC.1 and AMC.3
Module Management	IPMI	IPMI Version 2.0
XAUI / PCIe	Lanes	PCIe Gen 3 on ports 4-7 and 8-11, PCIe Gen3 x16 on tongue 2, optional PCIe Gen3 on ports 12-15 and 17-20
Configuration		
Power	AMC750	~100 Watts
Environmental	Temperature	Operating Temperature: -5° to 55°C (air flow > 400LFM) industrial and military versions also available (See <a href="#">environmental spec sheet</a> )
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s <sup>2</sup> (1.0G), 5-500Hz
	Shock	Operating 325G/2ms, 160G/1ms
	Relative Humidity	5 to 95 percent, non-condensing
Front Panel	LEDs	IPMI Management Control
		Activity
	I/O	Dual GbE via RJ-45
		Dual USB 3.0 via USB 3.0 standard A
		Graphics output via DVI-I Port
	Dual RS-232 via micro USB	
	Mechanical	Hot Swap Ejector Handle
Software Support	Operating Systems	Linux and Windows (consult VadaTech for other options)
Other		
MTBF	Per MIL-217F Handbook > TBD MTBF Hrs.	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBS	
Warranty	Two (2) years	

### INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and µTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

### Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

## ORDERING OPTIONS

### AMC750 – ABC – D00 – 00J

#### A = Ports 12-15 and 17-20

- 0 = Not routed
- 1 = Routed as PCIe

#### B = Tongue 2

- 0 = Not installed
- 1 = Installed

#### C = Front Panel Size

- 1 = Reserved
- 2 = Reserved
- 3 = Full-size
- 4 = Reserved
- 5 = Reserved
- 6 = Full-size, MTCA.1 (captive screw)

#### D = Trusted Platform Module

- 0 = None
- 1 = TPM provided

#### J = Temperature Range & Coating

- 0 = Commercial (–5° to +55° C), no coating
- 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane
- 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic
- 3 = Industrial (–20° to +70° C), no coating
- 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane
- 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic
- 6 = Military (–40° to +85° C), Humiseal 1A33 Polyurethane\*
- 7 = Military (–40° to +85° C), Humiseal 1B31 Acrylic\*

\*Edge of module for conduction-cooled boards

## RELATED PRODUCTS



AMC740 Tiler  
PrAMC



UTC004 MCH for μTCA  
Chassis (3rd generation)



UTC020 Power Module  
for μTCA Chassis

## CONTACT US

#### VadaTech Corporate Office

198 N. Gibson Rd.  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: (702) 896-3337  
Fax: (702) 896-0332

#### Asia Pacific Sales Office

7th Floor, No. 2, Wenhua Street, Neihu District, Taipei  
City, Taiwan 11445  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

#### VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way  
Ocean Village, Southampton, SO14 3JZ  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 381982  
Fax: +44 2380 381983