

## FMC218 – FMC High-speed DAC 14-bit at 2.5 GSPS Module

FMC, 14-bit DAC, 2.5 GSPS



### KEY FEATURES

- FPGA Mezzanine Card (FMC) per VITA-57
- Single FMC size
- Single AD9739 DAC 14-bit at 2.5 GSPS
- 2 V<sub>pp</sub> differential Analog output swing
- Programmable DSP clock
- Dynamic performance
  - 8 QAM carriers @ 400 MHz IF –71 dBc
  - 16 QAM carriers @ 400 MHz IF –68 dBc
  - 32 QAM carriers @ 400 MHz IF –65 dBc
  - 72 QAM carriers @ 600 MHz IF –61 dBc
- Single tone NSD @ 2.4 GSPS
  - 166 dBm/Hz @ 100 MHz IF
  - 162 dBm/Hz @ 1 GHz IF
- Connection via SSMC
  - Analog out
  - Reference clock input
  - TRIG input
  - TRIG output
- Mini DisplayPort for I/O

### Benefits of Choosing VadaTech


- Array of FMC's and FMC carriers available from VadaTech
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

The FMC218 is an FPGA Mezzanine Module per VITA 57 specification. The FMC218 has a single DAC 14-bit at 2.5 GSPS. The DAC converter utilizes the Analog Devices AD9739. A wide band PLL allows for direct RF Clock synthesis via the front panel.


The FMC218 is designed for synthesizing of broadband signals, with enhanced linearity and band flatness performances. The Analog output can be programmed for +/- 1V.

# FMC218 – FMC High-speed DAC 14-bit at 2.5 GSPS Module

## BLOCK DIAGRAM

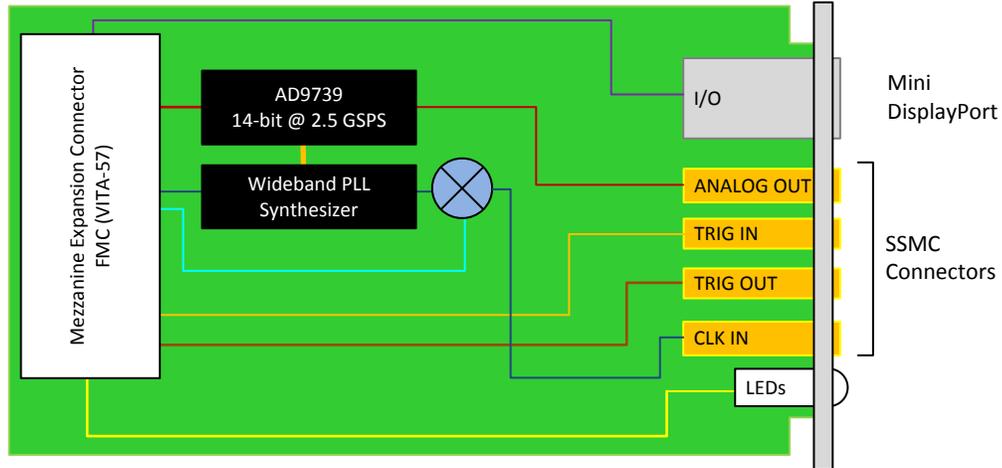

## FRONT PANEL

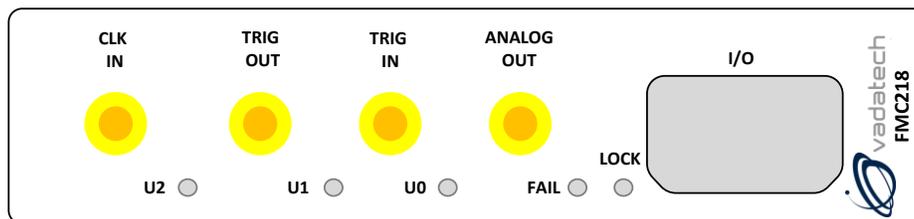

## SPECIFICATIONS

Architecture			
Physical	Dimensions	Single module	
		Width 2.71" (69 mm) Depth 3.01" (76.5 mm)	
Type	FMC	Single DAC	
Standards			
FMC	VITA-57	ANSI/VITA 57.1-2008	
Configuration			
Power	FMC218	4 W	
Environmental	Temperature	Operating Temperature: -5° to 45° C, (55°C for limited time, performance restrictions may apply), industrial and military versions also available (See <a href="#">environmental spec sheet</a> )	
		Storage Temperature: -40° to +85° C	
		Vibration	1G, 5 to 500 Hz on each axis
		Shock	30Gs each axis
Front Panel	Relative Humidity	5 to 95 percent, non-condensing	
	Interface Connectors	4x SSMC and 1x Mini DisplayPort	
	LEDs	Status and User defined	
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)	
		Humiseal 1B31 Acrylic (Optional)	
Other			
MTBF	MIL Hand book 217-F @ TBD Hrs		
Certifications	Designed to meet FCC, CE and UL certifications where applicable		
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards		
Warranty	Two (2) years		

### INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and  $\mu$ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

### Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

# FMC218 – FMC High-speed DAC 14-bit at 2.5 GSPS Module

## ORDERING OPTIONS

### FMC218 – A00 – 000 – GHJ

#### A = RF Clock Synthesizer

0 = On board PLL

1 = Front panel

#### G = FMC Board Spacing

0 = 10 mm (per VITA-57 specification)

1 = 17.5 mm \*

#### H = Operating Temperature

0 = Commercial

1 = Industrial

#### J = Conformal Coating

0 = None

1 = Humiseal 1A33 Polyurethane

2 = Humiseal 1B31 Acrylic

\* For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.

## RELATED PRODUCTS



AMC516 FPGA Carrier for FMC  
Virtex-7



AMC525 FPGA Carrier for Dual FMC  
Virtex-7



FMC210  
ADC 10-bit 2.6 GSPS

## CONTACT US

#### VadaTech Corporate Office

198 N. Gibson Rd.  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +1 702 896-3337  
Fax: +1 702 896-0332

#### Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District,  
Taipei 114, Taiwan  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

#### VadaTech European Sales Office

VadaTech House, Bulls Copse Road,  
Southampton, SO40 9LR  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 016403