

FMC162

MIL-STD-1553A/B

FMC162

Key Features

- Support for MIL-STD-1553A/B, MIL-STD-1760
- Quad channels

Benefits

- Advance MIL-STD-1553 Technology from DDC coupled with VadaTech FPGA Carriers
- Software support
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC162

The FMC162 is based on the Data Device Corporation (DDC) BU-67301B chip. It utilizes the world's most advanced MIL-STD-1553 technology. The module is low power, high MTBF, and high performance.

The FMC162 provide four channels of MIL-STD-1553.

Figure 1: FMC162

Block Diagram

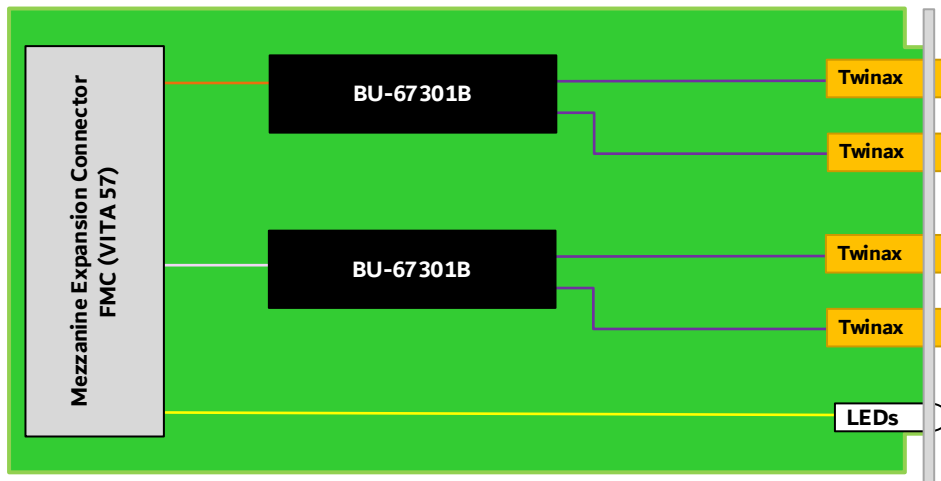


Figure 2: FMC162 Functional Block Diagram

Figure 3: FMC162 Front Panel

Specifications

Architecture	
Physical	Dimensions Single Module Width: 2.71" (69 mm) Depth: 3.01" (76.5 mm)
Type	FMC Quad Channel MIL-STD-1553A/B, Single FMC
Standards	
FMC	Type ANSI/VITA 57.1 - 2008
Configuration	
Power	FMC162 ~5W
Environmental	Temperature See Ordering Options Storage Temperature: -40° to +85°C Vibration 1G to 5-500 Hz on each axis Shock 30Gs each axis Relative Humidity 5 to 95% non-condensing
Front Panel	Interface Connectors 4x Twinax LEDs Status
Software Support	Operating System Agnostic
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty	Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC162 – 000-000-G0J

		G = FMC Board Spacing 0 = 10 mm (per VITA 57 specification) 1 = 17.5 mm*
		J = Temperature Range and Conformal Coating 0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Extended Industrial (–40° to +70°C), No coating 4 = Extended Industrial (–40° to +70°C), Humiseal 1A33 Polyurethane 5 = Extended Industrial (–40° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane** 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic**

Notes:

*For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.

**Conduction cooled; temperature is at edge of module. Consult factory for availability.

Related Products

AMC516



- AMC FPGA carrier for FMC per VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package with optional P2040
- Supported by DAQ Series™ data acquisition software

AMC532



- AMC FPGA based on Altera Stratix-V (5SGXEA) in F1932 package
- VITA 57.1 FMC HPC Connector (compatible with LPC)
- All FMC LA, HA, HB pairs routed bi-directionally

FMC109



- FPGA Mezzanine Card (FMC) per VITA 57
- Single module
- Quad SPF/SPF+ cages for Quad Ports

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.3 – OCT/24