

FMC231

**FMC Quad ADC 16-bit @
1 GSPS and Quad DAC 16-bit
@ 2.8 GSPS**

Key Features

- Quad ADC
 - ADS54J60 16-bit, 1.0 GSPS or ADS54J69 16-bit, 500 MSPS
- Quad DAC
 - DAC39J84 16-bit, 2.8 GSPS
- FPGA Mezzanine Card (FMC) per VITA 57.1
- Excellent dynamic performance
- Front panel interface includes CLK In and Trig In

Benefits

- High dynamic range for versatility
- Ideal for Radar and Antenna Arrays, Broadband Wireless, Communication Test Equipment, Microwave Receivers, SDR
- Compatible with a broad range of Xilinx- and Altera-based FMC carriers from VadaTech and others
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC231

The FMC231 is an FPGA Mezzanine Carrier (FMC) per VITA 57 specification. The board has quad ADC (the ADC chips are dual channels) and quad DAC (the DAC chip is quad channel).

The FMC231 utilizes TI ADS54J60 (option for ADS54J69) providing 16-bit conversion rates of up to 1.0 GSPS and a DAC DAC39J84 providing 16-bit conversion rates of up to 2.8 GSPS.

The analog input / output, clock and trigger interface of the FMC231 are routed via SSMC connectors. The internal clock frequency is programmable and the clock is capable of locking to an external reference. Further the module allows direct RF sampling clock as an option and it will bypass the on board wideband PLL.

Block Diagram

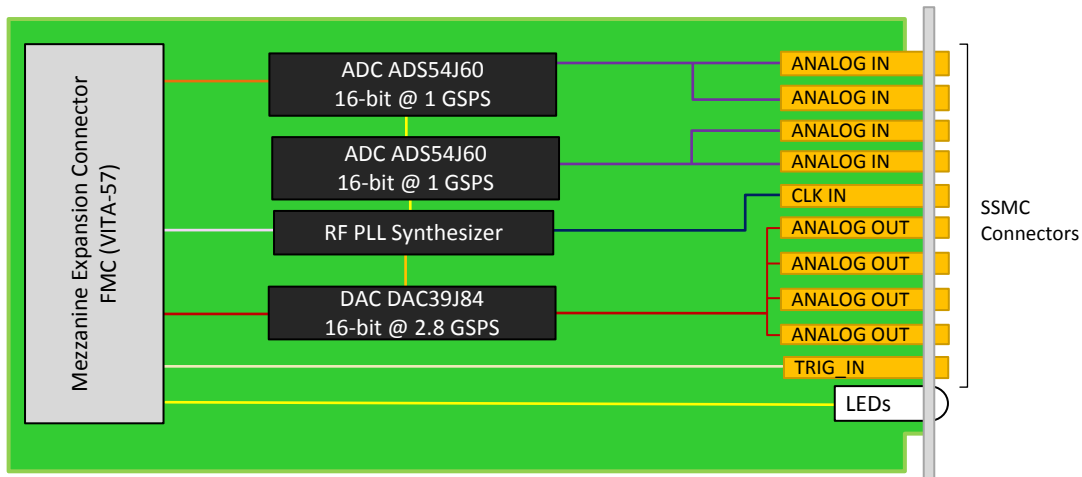


Figure 1: FMC231 Functional Block Diagram

Front Panel

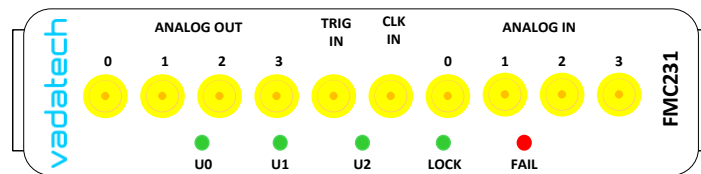


Figure 2: FMC231 Front Panel

Specifications

Architecture		
Physical	Dimensions	Single module
		Width: 2.71" (69 mm)
		Depth 3.01" (76.5 mm)
Type	FMC	Quad ADC and DAC, Single FMC
Standards		
FMC	VITA-57	ANSI/VITA 57.1-2008
Configuration		
Power	FMC231	~10W
Environmental	Temperature	Operating temperature: -5° to 55° C (air flow requirements >400 LFM)
		Storage Temperature: -40° to +85°C
	Vibration	1G, 5 to 500 Hz on each axis
	Shock	30Gs each axis
	Relative Humidity	5 to 95 per cent, non-condensing
Front Panel	Interface Connectors	10x SSMC
	LEDs	Status
Software Support	Operating System	Agnostic
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

Ordering Options

FMC231 – AB0 – 000 – G0J

A = ADC		G = FMC Board Spacing
0 = ADS54J60 (1 GSPS) 1 = ADS54J69 (500 MSPS)		0 = 10 mm (per VITA-57 specification) 1 = 17.5 mm *
B = DAC (DAC39J84)		
0 = Not installed 1 = Installed		
		J = Conformal Coating
		0 = Commercial (–5° to +55° C), No coating 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70° C), No coating 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85° C), Humiseal 1A33 Polyurethane ** 7 = Extended (–40° to +85° C), Humiseal 1B31 Acrylic **

* For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.

** Conduction cooled, temperature is at edge of module. Consult factory for availability

Related Products

AMC516



- AMC FPGA carrier for FMC per VITA-57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package with optional P2040
- Supported by DAQ Series™ data acquisition software

AMC532



- AMC FPGA based on Altera Stratix-V (5SGXEA) in F1932 package
- VITA 57.1 FMC HPC Connector (compatible with LPC)
- All FMC LA, HA, HB pairs routed bi-directionally

FMC109



- FPGA Mezzanine Card (FMC) per VITA-57
- Single module
- Quad SPF/SPF+ cages for quad ports

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014
Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan
Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR
Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VADATECH INCORPORATED, ALL RIGHTS RESERVED.
DOC NO. 4FM737-12 REV 01 | VERSION 1.2 – NOV/17