

VT817

1U MicroTCA.4 Chassis Platform, PCIe Expansion



VT817

Key Features

- MTCA.4 PCIe Expansion chassis platform
19" x 1U x 14.2" deep
- Compliant to MTCA.4 specifications with rear IO for High-Energy Physics and other applications
- Supports up to two MTCA.4 mid-size, double module AMCs and RTMs
- Integrated shelf manager
- Ports 4-7 and 8-11 are routed to the two AMC slots from the PCIe switch
- Front panel PCIe Gen3 ports (x4, x8 or x16) through quad SFF-8644 connectors
- Right-to-left cooling

Benefits

- PCIe Expansion chassis for MicroTCA.4 in a compact 1U size
- Flexible fibre/copper installation options
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

μ TCA[®]



vadatech
THE POWER OF VISION



VT817

The VT817 is a convenient low-cost MicroTCA.4 PCIe Gen3 Expansion solution. The shelf offers two AMC slots and an integrated MCH. The front panel ports accept PCIe Gen3 inputs from VadaTech's PCI123 PCIe Gen3 board. In use with the PCI123, the VT817 can link x16 PCIe Gen3 to an Industrial PC. There are options for single PCIe input x16, dual PCIe inputs using x8 links or quad PCIe inputs using x4 links.

Each AMC slot routes to the PCIe Switch as dual x4 or single x8.

The Module routes TCLKA/B/C/D as well CLK3 as 100Mhz HCSL.

The double module AMC slots meet the MicroTCA.4 specification for applications that require rear I/O and signal conditioning. Applications include High Energy Physics, video processing, defense, and network security.

Power Supplies

The VT817 uses a removable 400 W AC or 460 W DC power supply. It is located to the rear of the chassis.

Cooling and Temperature Sensors

The VT817 has an intelligent Cooling Unit. The cooling airflow is from right to left. The removable Air Filter has a switch to detect its presence and can be monitored for when it needs to be replaced.

Backplane

A mid-plane for the shelf management with the front panel I/O plugs into the passive backplane.

JSM

There is an optional JTAG Switch Module (JSM) to provide JTAG access to the front panel.

Scorpion™ Software

VadaTech's Scorpionware software can be used to access information about the current state of the Shelf or the Carrier, obtain information such as the FRU population, or monitor alarms, power management, current sensor values, and the overall health of the Shelf. The software GUI is very powerful, providing a Virtual Carrier and FRU construct for a simple, effective interface.



Figure 1: VT817 Front View



Figure 2: VT817 Rear View

Block Diagram

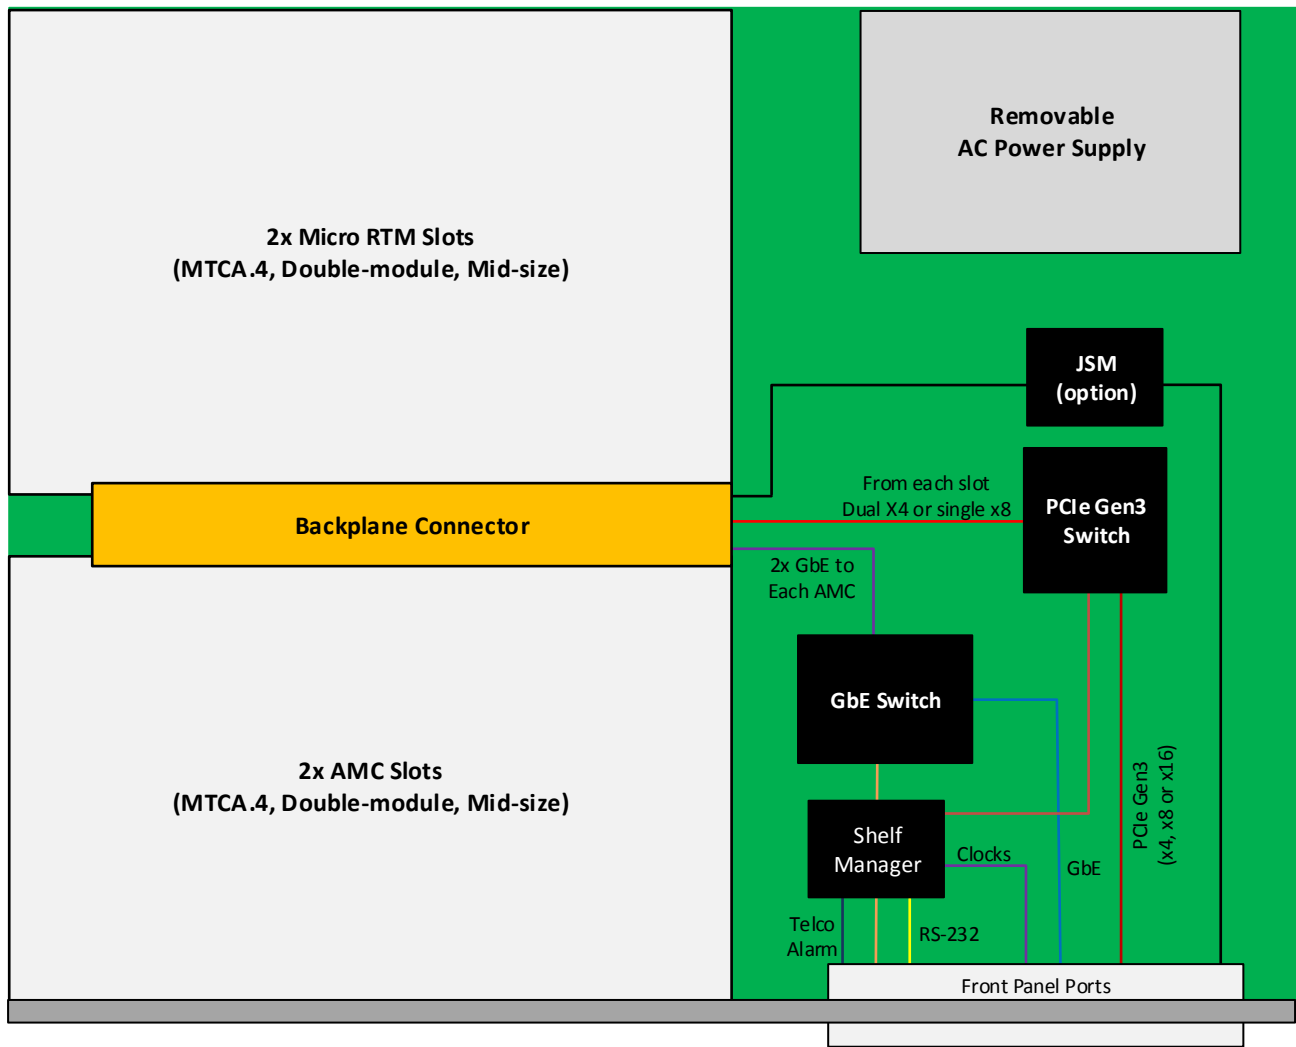


Figure 3: VT817 Functional Block Diagram

Backplane Connections

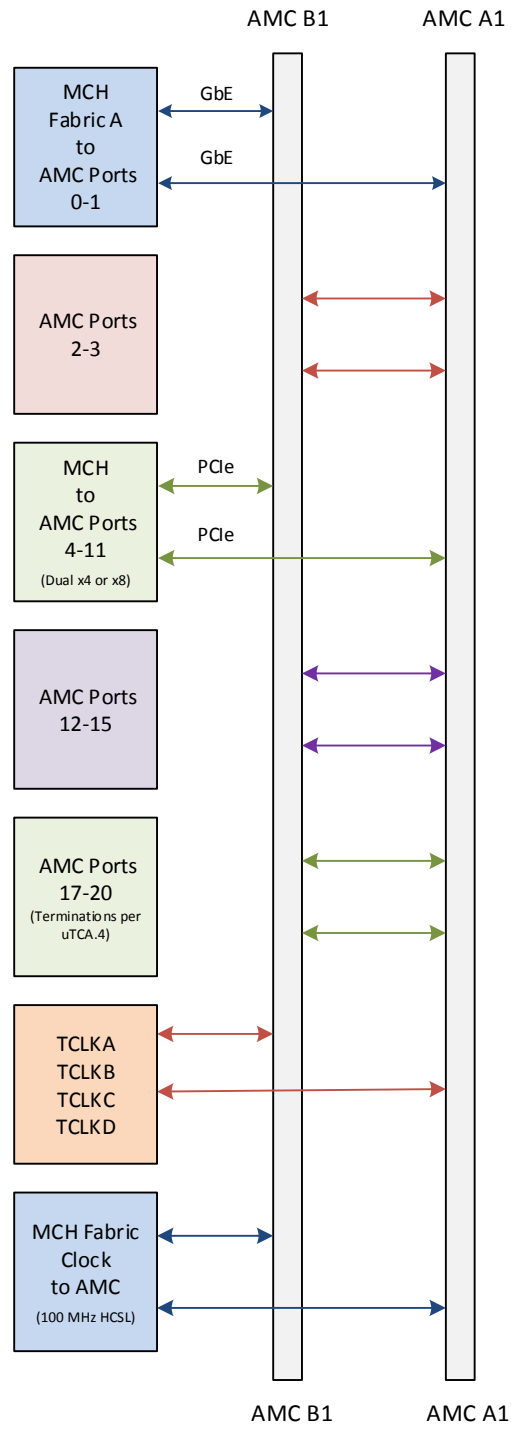


Figure 4: VT817 Backplane Connections

Specifications

Architecture	
Physical	Dimensions Height: 1U Width: 19" Depth 14.2"
Type	MicroTCA Chassis Two MTCA.4 Slots with MRTMs Telco Alarm, JSM, Single MCH, Single/Dual Power Module and Intelligent Cooling Unit
Standards	
AMC	Type AMC.0, AMC.1, AMC.2, AMC.3 and AMC.4
MTCA	Type PICMG 3.0 Rev 3.0
Configuration	
Power	VT817 400 W universal AC with frequency from 47-63 Hz) 460 W –36 V to –75 V DC
Environmental	Temperature Operating temperature: 0°C to 55°C, see environmental spec sheet Storage Temperature: –40° to +70°C
	Altitude 10,000 ft operating 40,000 ft non-operating
	Relative Humidity 5 to 95% non-condensing
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty	Two (2) years

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VT817 – A00-0EF-GHJ

A = Power Supply		G = Module Slot Size
0 = AC (400 W) 1 = DC -36 V to -75 V (460 W)		0 = Dual double module mid-size slots 1 = One full-size double module slot (slot A1 not used) 2 = Dual Single module mid-size slots 3 = One full-size single module slot (slot A1 not used)
	E = Telecom/GPS Clock	H = Temperature Range
	0 = No Clock 1 = Telecom TCXO* 2 = GPS VCTCXO* (30.72 MHz)** 3 = GPS VCTCXO* (10.00 MHz)** 4 = Clock distribution only 5 = GPS VCTCXO* (50.00 MHz)** 6 = Reserved	0 = Commercial 1 = Industrial
	F = JTAG Switch Module (JSM)	J = Conformal Coating
	0 = No JSM 1 = JSM	0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Notes: *The Crystal Oscillator is Stratum-3; for lower cost solution contact VadaTech Sales.

** Frequencies from 8 MHz to 52 MHz are available.

Related Products

AMC523



- Dual DAC 16-bit @ 250 MSPS utilizing MAX5878 device (user programmable for lower sampling rate)
- Xilinx Kintex-7 FPGA XC7K410T in FFG900 package
- Supported by DAQ Series™ data acquisition software

MRT523



- MicroTCA.4 RTM for the AMC523
- Twelve channel ADC 16-bit @ 125 MSPS utilizing AD9653 device routed to AMC523
- Two analog outputs from AMC523's DACs Mezzanine

PCI123



- PCIe Gen3 (x16) Bus Expansion module
- Connects to root complex node board using up/down stream ports
- Options for (1x) of x16 PCIe, (2x) of x8 PCIe or (4x) of x4 PCIe utilizing SFF-8644 connectors

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2018 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 4.4 – NOV/18