

# VT819

## 1U MTCA.4 Chassis with 2 AMC Slots, Economic



VT819

## Key Features

- Compact 1U MicroTCA.4 chassis
- Compliant to MTCA.4 specifications with rear IO
- Supports up to two MTCA.4 mid-size, double module AMCs and Rear Transition Modules (RTMs)
- Side to side airflow
- Integrated shelf manager with GbE Switch
- Point-to-point backplane routing across the two AMC slots on ports 4-7 and 8-11
- Single 400W AC pluggable from rear
- Optional JTAG Switch Module (JSM)

## Benefits

- Low-cost development chassis for MicroTCA.4 in a compact 1U size
- Design utilizes proven VadaTech subcomponents and engineering techniques
- AS9100 and ISO9001 certified company
- Full system supply from industry leader

***μTCA***<sup>®</sup>



**vadatech**  
THE POWER OF VISION



# VT819

The VT819 is the ideal MTCA.4 Development Platform. The low-cost unit offers two AMC slot, an integrated MCH and a managed Layer two GbE Switch. The double module AMCs meet the MTCA.4 specification for applications that require rear I/O and signal conditioning.

The Module routes TCLKA/B/C/D as well CLK3 as 100 MHz HCSL.

## Power Supplies

The VT819 uses a removable 400W AC power supply. It is located in the rear of the chassis.

## Cooling and Temperature Sensors

The VT819 has an intelligent Cooling Unit. The cooling airflow is from right to left. The removable air filter has an optical switch to detect its presence and can be monitored for when it needs to be replaced.

There are temperature sensors in the chassis that monitor the intake and the outtake air temperature throughout the chassis.

## Scorpion™ Software

VadaTech's Scorpionware™ software can be used to access information about the current state of the Shelf or the Carrier, obtain information such as the FRU population, or monitor alarms, power management, current sensor values, and the overall health of the Shelf. The software GUI is very powerful, providing a Virtual Carrier and FRU construct for a simple, effective interface.

## JSM

There is an optional JTAG Switch Module to provide JTAG access to the front.



Figure 1: VT819 Chassis Front View



Figure 2: VT819 Chassis Rear View

# Block Diagram

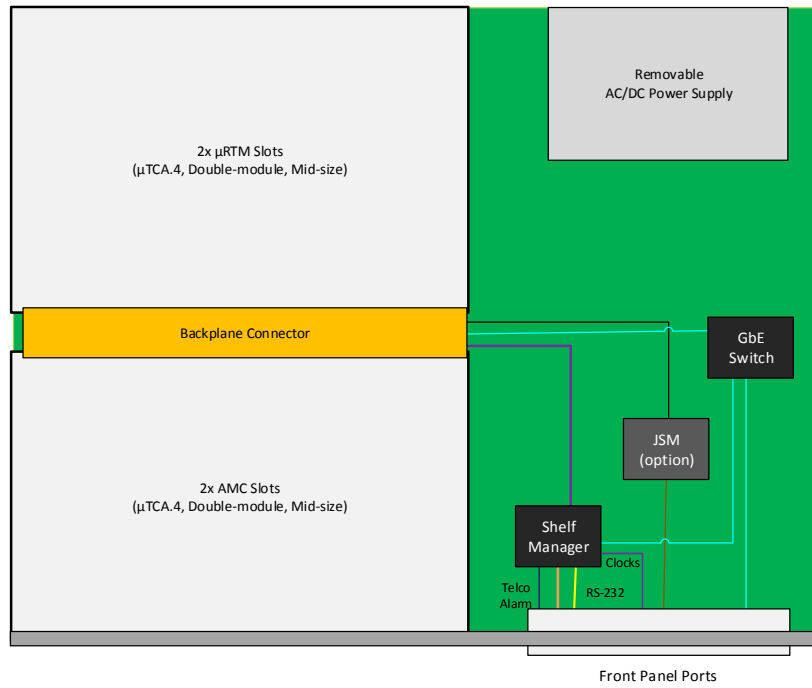


Figure 3: VT819 Block Diagram

# Backplane Connections

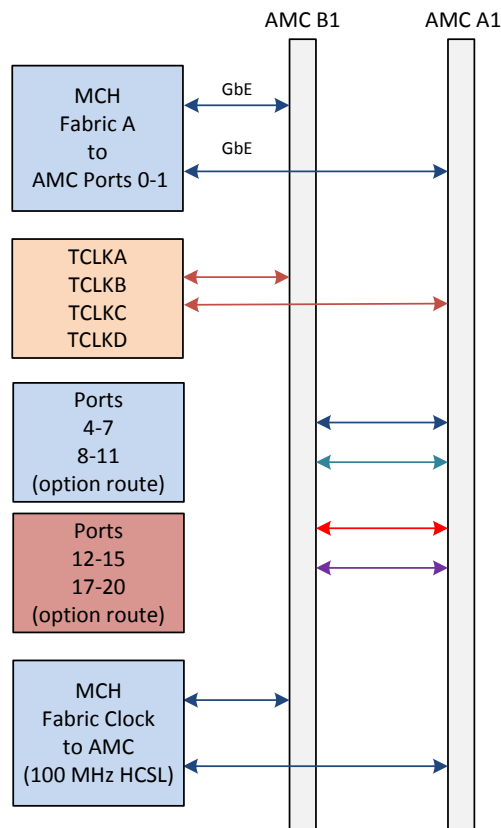


Figure 4: VT819 Backplane Connections

# Chassis Layout



Figure 5: Chassis Layout Front



Figure 6: Chassis Layout Rear

# Specifications

<b>Architecture</b>		
<b>Physical</b>	<b>Dimensions</b>	Height: 1U
		Width: 19"
		Depth: 14.2"
		Weight: 8 lbs
<b>Type</b>	<b>MTCA Chassis</b>	Two MTCA.4 Slots with Micro RTMs Telco Alarm, JSM, integrated GbE, Single Power Module and Intelligent Cooling Unit
<b>Standards</b>		
<b>AMC</b>	<b>Type</b>	AMC.0, AMC.1, AMC.2, AMC.3 and AMC.4
<b>MTCA</b>	<b>Type</b>	PICMG 3.0 Rev 3.0
<b>Configuration</b>		
<b>Power</b>	<b>VT819</b>	400 W AC, 85-265 VAC with frequency from 47-63 Hz 400 W DC, -36 to -75 VDC
<b>Environmental</b>	<b>Temperature</b>	See ordering options Storage Temperature: -40° to +70°C
	<b>Altitude</b>	10,000 ft operating 40,000 ft non-operating
	<b>Relative Humidity</b>	5 to 95% non-condensing
<b>Cooling</b>		Right to Left
<b>Other</b>		
<b>MTBF</b>		MIL Hand book 217-F@ TBD hrs
<b>Certifications</b>		Designed to meet FCC, CE and UL certifications, where applicable
<b>Standards</b>		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
<b>Warranty</b>		Two (2) years

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VT819 – ABC-DEF-GHJ

<b>A = Power Supply</b> 0 = Single AC 1 = DC -36 to -75V	<b>D = Ports 8-11 Connection</b> 0 = 8-11 point to point 1 = 8-11 not connected	<b>G = Module Slot Size</b> 0 = Dual double module mid-size slots 1 = One full-size double module slot (slot A1 not used) 2 = Dual Single module mid-size slots 3 = One full-size single module slot (slot A1 not used)
<b>B = JSM</b> 0 = Not installed 1 = Included	<b>E = Ports 12-15 Connection</b> 0 = 12-15 point to point 1 = 12-15 not connected	<b>H = Temperature Range</b> 0 = Commercial (Operating Temperature -0° to 55° C) 1 = Industrial
<b>C = Telecom/GPS Clock</b> 0 = None 1 = Telecom TCXO <sup>1</sup> 2 = GPS VCTCXO <sup>1</sup> (30.72 MHz) <sup>2</sup> 3 = GPS VCTCXO <sup>1</sup> (10.00 MHz) <sup>2</sup> 4 = Clock distribution only 5 = GPS VCTCXO <sup>1</sup> (50.00 MHz) <sup>2</sup> 6 = Reserved	<b>F = Ports 17-20 Connection</b> 0 = 17-20 point to point 1 = 17-20 not connected	<b>J = Conformal Coating</b> 0 = None 1 = Humiseal 1A33 polyurethane 2 = Humiseal 1B31 acrylic

Notes:

- 1 The Crystal Oscillator is Stratum-3; for lower cost solution contact VadaTech Sales.
- 2 Frequencies from 8 MHz to 52 MHz are available.

## Related Products

AMC522



- Dual channel MAX5878 DAC with 250 MSPS @16-bit resolution
- Compliant to MTCA.4, double module, mid-size (full-size optional) with rear I/O
- Xilinx Kintex-7 FPGA

AMC725



- Double module, mid-size per AMC.0 and MTCA.4
- Intel® Xeon E3 processor options with PCH
- DVI graphics (SM750 w/ 16 MB DDR), up to 1920x1440 resolution

CM045



- Data Processing AMC in double module, mid-size (full-size optional)
- Compliant to MTCA.4
- High-speed Kintex-7 FPGA

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2018 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 1.3- JUN/18